


Flow fitting

DFA

Introduction

Flow fitting for available as DFA25 or DFA32 for pvc-u pipes
 $d=20(25)\dots63\text{mm}$, without union nut (delivery content of sensor/adaptor).

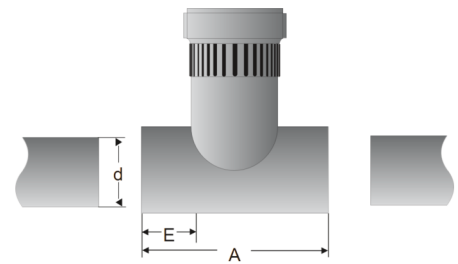

DFA25 fitting

fits Conductivity cells LF2203



DFA32 fitting

fits Conductivity cells LF4213/4213,
 converter CONDIX4213 and sensor-
 adaptor EA1200/2200



Wide selection


Available for pipe diameters
 20/25/35/40/50 and 63mm (20mm
 not available for DFA25).



View product on our website

www.senseca.com/en/product/dfa-flow-fitting

DFA32



Flow fitting DFA32 for pvc-u pipes d=20...63mm, without union nut (delivery content of sensor/adaptor).


Order Code

DFA32 - - -
 DFA32 - - -

i Enter the code for your selected option in the order code field above. The numbering corresponds to the sets from which you can choose. Note that some options can only be used in certain combinations.

Nr.	Code	Description
1. Outer diameter of the connecting pipe	20	DN 20
	25	DN 25
	32	DN 32
	40	DN 40
	50	DN 50
	63	DN 63
2. Process connection	1	Gluing sleeve, 2-times
3. Material	1	PVC-U

DFA25



Flow fitting DFA25 for pvc-u pipes d=25...63mm, without union nut (delivery content of sensor/adaptor).

Order Code


DFA25 - 1. - 2. - 3.

i Enter the code for your selected option in the order code field above. The numbering corresponds to the sets from which you can choose. Note that some options can only be used in certain combinations.

Nr.	Code	Description
1. Outer diameter of the connecting pipe	25	DN 25
	32	DN 32
	40	DN 40
	50	DN 50
	63	DN 63
2. Process connection	1	Gluing sleeve, 2-times
3. Material	1	PVC-U

Instructions


Dimensions



d	A	E
20 (DFA32, only)	78	22
25		
32		
40	98	26
50	118	31
63	144	38

Table of dimensions. Values A/E in mm

Diagrams

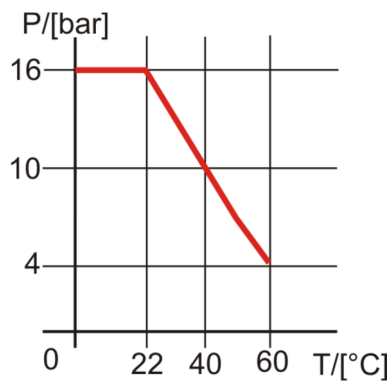

Temperature-pressure diagram PVC-U